



Features :

- Universal AC input: 90-305VAC
- Built-in active PFC Function: >0.92
- Protections: SCP/OCV/OVP/OTP
- IP67/IP65 sealing design for outdoor or indoor installations, and cooling by free air convection
- Built-in constant current limiting circuit (CV+CC model), output current/voltage adjustable
- Optional for 1~10Vdc, resistor or PWM signal 3 in 1 dimming function
- Suitable for LED lighting, Street lighting, Display applications
- Suitable for wet/damp/dry/cold temperature/high temperature locations
- High efficiency up to 94%
- 6000V lighting surge protection
- High reliability: Adopt RAGU patent potting technology for glue stress release
- Compliance to UL60950-1, IEC60950& UL8750 safety regulations
- 5 years warranty (Note .9)



RG150-W1C XXX SH X: Note : X can be A,T,B, the output current is XXX/100  
 A: IP65 rated, Output current and voltage level can be adjustable through internal potentiometer .  
 T: IP67 rated, Output current level adjustable through output cable with 1-10Vdc or PWM signal or resistance.  
 B: IP67 rated, Without dimming or adjustable function, connected with input/output cable .


■ SPECIFICATION

MODEL		RG250-W1C1050SHX	RG250-W1C700SHX	RG250-W1C520SHX
OUTPUT	DC VOLTAGE	24V	36V	48V
	RATED CURRENT	10.5A	7.0A	5.2A
	VOLT RANGE AT CC OUTPUT	14.4~24V	21.6~36V	28.8~48V
	RATED POWER	250W	250W	250W
	RIPPLE&NOISE Note.2	150mvP-P	250mvP-P	250mvP-P
	VOLTAGE RANGE Note.5	22~27V	33~40V	43~53V
	CURRENT ADJ RANGE	Can be adjusted by internal potentiometer, A type only		
		6.3~10.5A	4.2~7.0A	3.1~5.2A
	VOLTAGE TOLERANCE Note.3	±1%		
	LINE REGULATION	±0.5%		
	LOAD REGULATION	±0.5%		
	SETUP,RISETIME Note.7	2500ms 80ms (at full load) 230VAC/115VAC		
HOLD UP TIME (typ.)	16ms (at full load) 230VAC/115VAC			
EFFICIENCY (Typ.)	93.5%	94.0%	94.0%	
INPUT	VOLTAGE RANGE Note.4	90~305VAC		
	FREQUENCY RANGE	47~63Hz		
	POWER FACTOR(Typ.)	PF>0.98/115VAC PF>0.95/230VAC PF>0.92/277VAC(at full load)		
	AC CURRENT (Typ.)	4.0A/115VAC 2.0A/230VAC 1.2A/277VAC		
	INRUSH CURRENT (Type.)	Cold start 75A(twidth=425us at 50% Ipeak)/230VAC		
LEAKAGE CURRENT	<0.75mA/277VAC			
PROTECTION	OVER CURRENT	95~108%		
	SHORT CIRCUIT	Protection type: constant current limiting, recovers automatically after fault condition is removed		
	OVER VOLTAGE	28~34V	41~46V	54~60V
		Protection type: Shut down o/p voltage with auto-recovery or re-power on to recovery		
	OVER TEMP	100°C ±10°C		
	Protection type: shut down output, recovers automatically after temperature goes down to definite level			
ENVIRO	WORK TEMP	-40°C~70°C (Refer to "derating curve")		

	WORK HUMIDITY	5~95%RH non-condensing
	STORAGE TEMP.,HUMIDIT	-40~+80℃, 10~95%RH
	TEMP.COEFFICIENT	±0.03%/℃(0~50℃)
	VIBRATION	10-500Hz,5G 12 min./1 cycle, period for 72min. each along X,Y,Z axes
SAFETY& EMC	SAFETYSTANDAR Note.6	CE/CBStandard :EN/IEC61347-1 EN/IEC61347-2-13 UL Standard: UL8750 & UL1012 design refer to UL60950 UL60950 IEC60950 GB4943
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KAC
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG,O/P-FG 100MOhms/500VDC/25℃/70%RH
	EMC EMISSION	EN55015, EN55022 ( CISPR22 ) Class B CE/EMC Standard: EN55015, EN61000-3-2/3 ; FCC Standard: FCC Part
	EMC IMMUNITY	EN61000-4-2,3,4,5,6,8,11 EN61547 EN55024 (Surge 6KV)
OTHERS	MTBF	≥300Khrs MIL-HDBK-217F(25℃)
	DIMENSION	243.0*68.0*40.mm (L*W*H)
	PACKING	1.25kg: 12pcs/15.0kg/0.74CUFT
NOTE	<ol style="list-style-type: none"> <li>All parameters NOT specially mentioned are measured at 230VAC input , rated load and 25℃ ambient temperature .</li> <li>Ripple&amp;Noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf &amp;47uf parallel capacitor .</li> <li>Tolerance: includes set up tolerance, line regulation and load regulation.</li> <li>Derating may be needed under low input voltages . Please check the static characteristics for more details .</li> <li>Only A type</li> <li>Safety and EMC design refer to EN60598-1 , subject 8750(UL) ,CNS15233 ,GB7000.1 , FCC part18.</li> <li>Length of set up time is measured at cold first start , Turning ON/OFF the power supply may lead to increase of the set up time</li> <li>The power supply is considered as a component that will be operated in combination with final equipment , Since EMC performance will be affected by the complete installation , the final equipment manufacturers must re-qualify EMC Directive on the complete installation again</li> <li>Refer to warranty statement .</li> </ol>	


## Mechanical Specification

### ● RG250 A-type

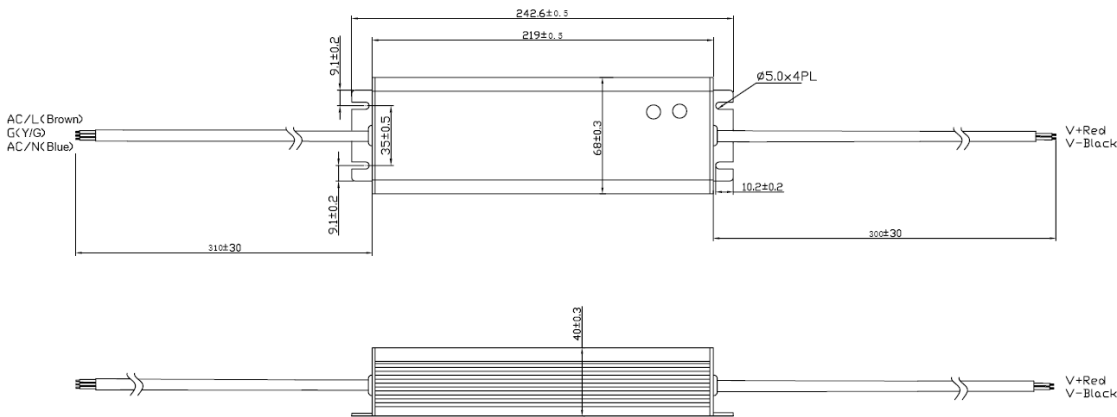


RG250 - A

### ● RG250 T-type

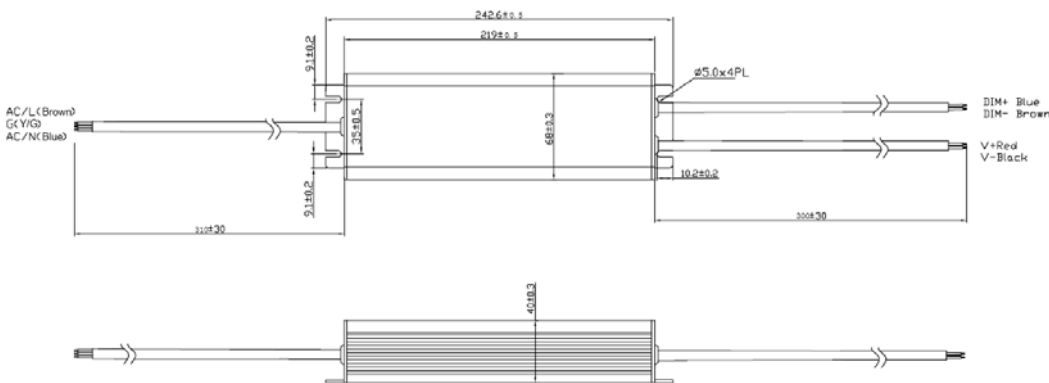

RG250 - T

● RG250 B-type

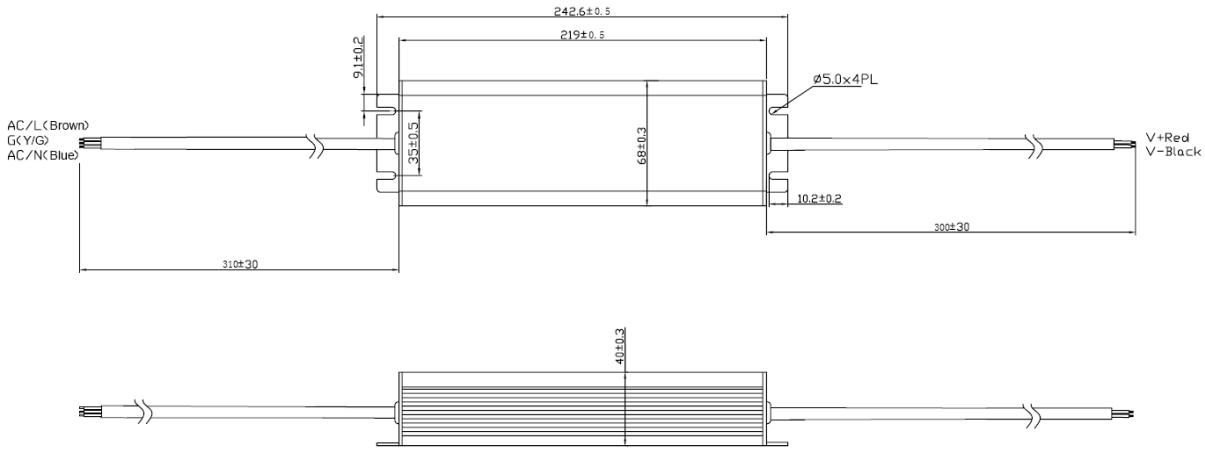


RG250 - B

■ DRIVING METHODES OF LED MODULE

There are two major kinds of LED driver method "Directive drive" and "with LED driver"

A typical LED power supply may either work in "constant voltage model (CV) or constant current model (CC)" to drive the LEDs .


RAGU's LED power supply with CV+CC characteristic can be operated at both CV mode ( with LED driver , at area(A) and CC mode(direct driver at area (B) .

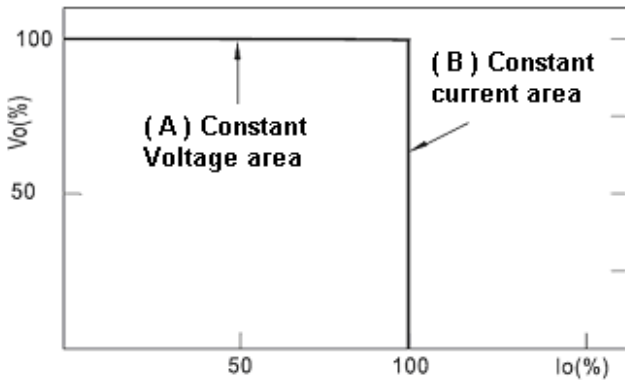

Typical LED power supply I-V curve

■ Power Factor Characteristic


Constant Current Mode

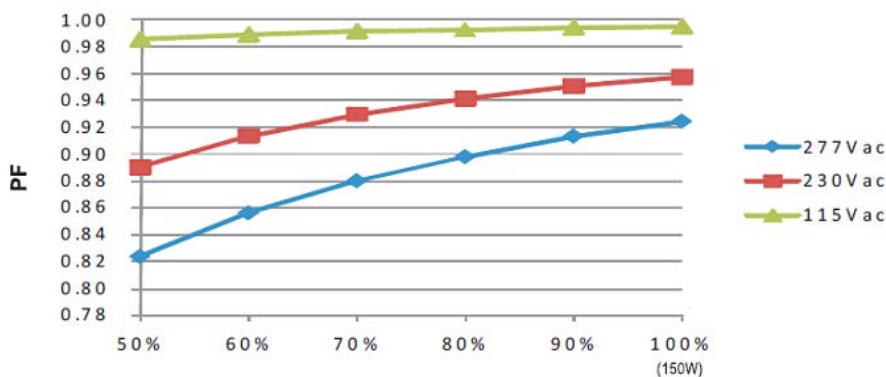



EFFICIENCY VS LOAD (48V model)

RG250 Series possess superior working efficiency that up to 94% can be reached in field applications .

Efficiency(%)

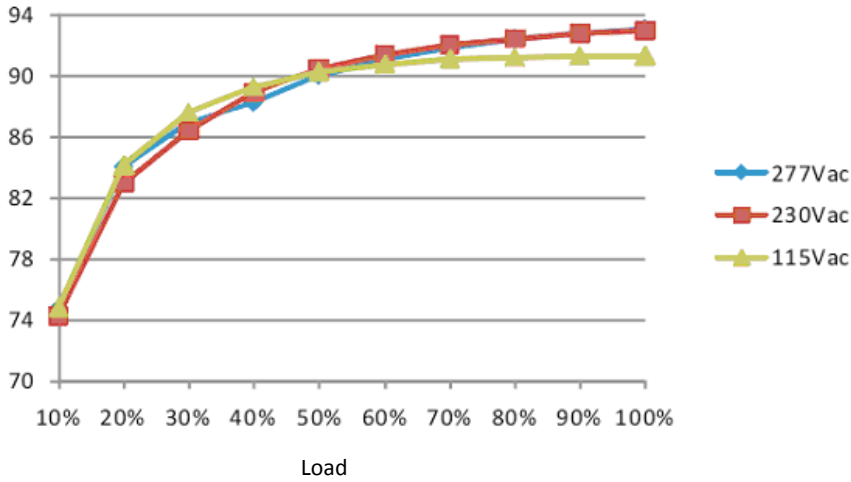

DERATING CURVE

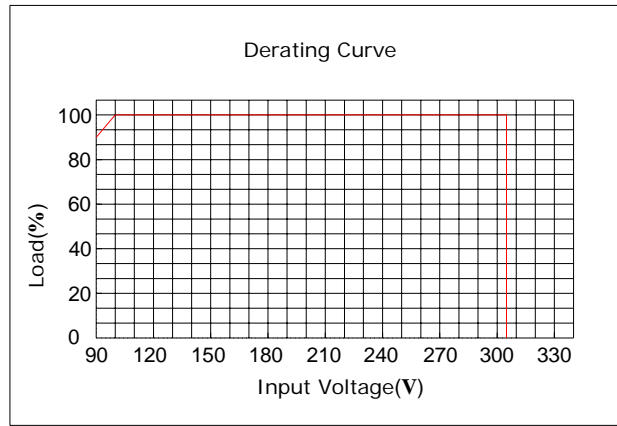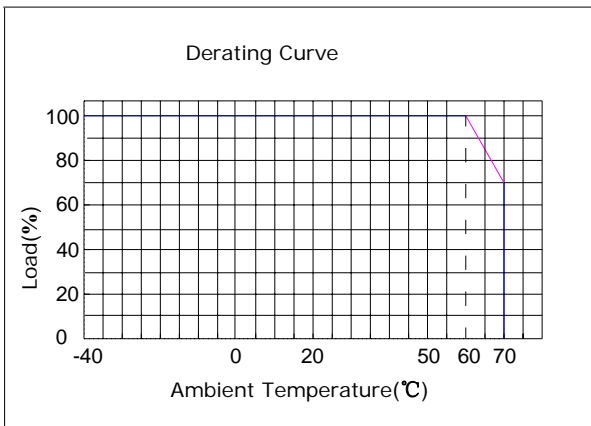

DIMMING OPERATION (for T-type only)

- ✧ Built-in 3 in 1 dimming function , IP67 rated . Output constant current level can be adjusted through output cable by connecting a resistor or 1-10Vdc or 10V PWM signal between DIM+ and DIM-
- ✧ Please DO NOT connect "DIM-" to "-V" .

Refer to resistance value for output current adjustment (Typical) .

resistance value (KΩ)	10	20	30	40	50	60	70	80	90	100	OPEN
Percentage of rated current (%)	10	20	30	40	50	60	70	80	90	100	95~108

1~10V dimming function for output current adjustment (Typical)


Dimming value(V)	1	2	3	4	5	6	7	8	9	10	OPEN
Percentage of rated current (%)	10	20	30	40	50	60	70	80	90	100	95~108

10V PWM signal for output current adjustable (Typical) : Frequency range 100Hz~3KHz

Duty value(%)	10	20	30	40	50	60	70	80	90	100	OPEN
Percentage of rated current (%)	10	20	30	40	50	60	70	80	90	100	95~108

- Using the built-in dimming function on T-type model can't turn the lighting fixture totally dark . Please refer to the connection method below to achieve 0% brightness of the lighting fixture connection to the LED power supply unit .
- Direct connecting to LEDs is suggested , but is not suitable for using additional drivers .

Dimming connection diagram for turning the lighting fixture ON/OFF :

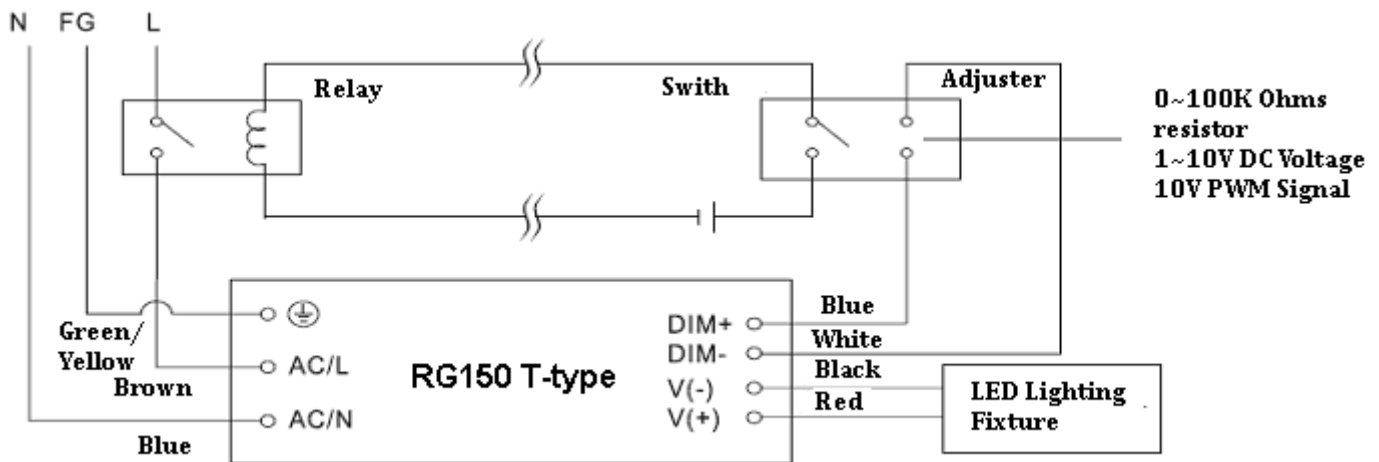

Using a switch and relay can turn ON/OFF the lighting fixture

1. Output constant current level can be adjusted through output cable by connecting a resistor or 1-10Vdc or PWM signal between DIM+ and DIM-

2. The LED lighting fixture can be turned ON/OFF by the switch .