

## Features :

- Design for indoor installations
- Protections: Short circuit / Overload/Over temperature
- Cooling by free air convection
- 100% full load burn-in test
- Suitable for LED lighting
- Products through CE, RoHS S Certification
- 2 years warranty

**CE RoHS**




## SPECIFICATION

MODEL		12V240W	24V240W			
OUTPUT	DC VOLTAGE	12V	24V			
	RATED CURRENT	20A	10A			
	CURRENT RANGE	0 ~ 20A	0 ~ 10A			
	RATED POWER	240W	240W			
	RIPPLE & NOISE (max.) <sup>NOTE 2</sup>	150mV	150mV			
	VOLTAGE TOLERANCE <sup>NOTE 3</sup>	±2%	±2%			
	SETUP, RISE TIME	80ms/220VAC				
	HOLD UP TIME (Typ.)	60ms/220VAC				
INPUT	VOLTAGE RANGE	110 ~ 250VAC				
	FREQUENCY RANGE	50 ~ 60Hz				
	POWER FACTOR (Typ.)	PF>0.6/220VAC				
	EFFICIENCY (Typ.)	83%	84%			
	AC CURRENT (Typ.)	2.27A/220VAC				
PROTECTION	Short circuit	Protection type : recovers automatically after fault condition is removed				
	Overload	overload protected @ 115-140% above peak rating				
	Over temperature	Protection type : Shut down o/p voltage, re-power on to recover				
ENVIRONMENT	WORKING TEMP.	-30 ~ +50°C (Refer to output load derating curve)				
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C , 10 ~ 99% RH				
SAFETY & EMC	SAFETY STANDARDS	CE Mark (LVD)				
	WITHSTAND VOLTAGE	I/P-O/P: 1.5KVAC I/P-GND:1.5KVAC				
	EMC Test Standards	EN55015:2006 ; EN61547:1995+A1:2000 ; EN61000-3-2:2006 ; EN61000-3-3:1995+A2:2005 ; EN61347-1:2001 ; EN61347-2-13:2006				
NOTE	<p>1. All parameters NOT specially mentioned are measured at 220VAC input, rated load and 25°C of ambient temperature.</p> <p>2. Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uF &amp; 10uF parallel capacitor.</p> <p>3. Tolerance : includes set up tolerance, line regulation and load regulation.</p>					

### Others

DIMENSION	200×111×49(mm) (L×W×H)
CARTON QUANTITY	20PCS/Carton
CARTON SIZE	455×280×250 (mm)
WEIGHT	780g/PCS

### Derating Curve

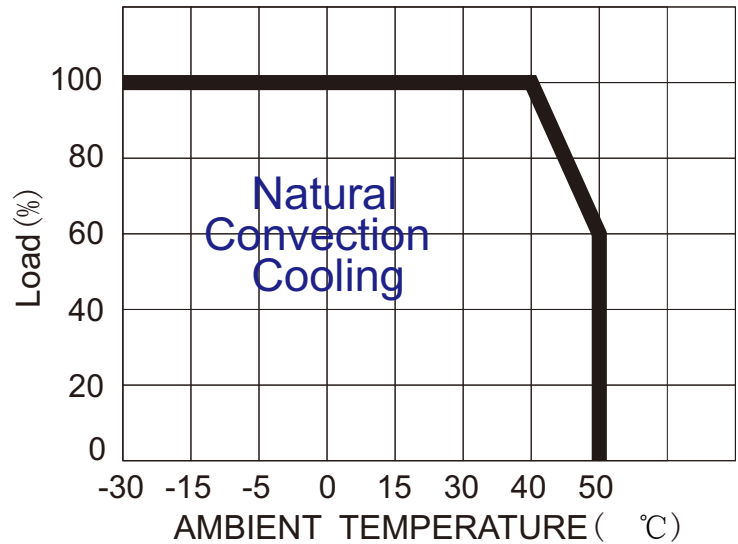

### Mechanical Specification

